

The Hideaway compact



Installation Instructions

Trade – Please leave instructions and the Glad Sample Pack inside the bin bucket for owner.

Unpack Unit

- Remove all polystyrene.

Remove Tracks (see fig.1)

- Fully extend tracks, find both black lugs (one on each outer side of track).
- Push left lug up and right lug down, pulling the track towards you until it separates from the unit.

Body / Main Frame

- Position main frame inside cupboard carcass, secure with the four 20mm sure fix screws provided. Remove perfume sachet from plastic covering.

Fit Door to Unit Door Bracket (for door models only)

- Screw a 4mm self tapping screw into the centre hole, until the point of the screw is protruding approx 3mm.
- Align door front correctly against the door of cupboard, then tighten centre screw.
- Check positioning; proceed to marking and screwing the four remaining screws.


Re-Attach the Tracks

- Ensure the tracks attached to the main frame are pushed all the way inside the cupboard. Ensure inner slider is pulled all the way forward.
- Line up the tracks on door to those on the main frame.
- Push tracks all the way in; pull out again to ensure correct positioning. It should slide with ease.

Installation information for models KC15H, KC20H, KC30H, KC40H, KC50H: If hinges are used that do not allow the door to clear the opening fully, allow an extra 10mm width. Installation also requires that the top door hinge be 150mm from the top of the door to allow clearance for the bin handle.



FIGURE 1 – TRACK REMOVAL (LEFT SIDE)

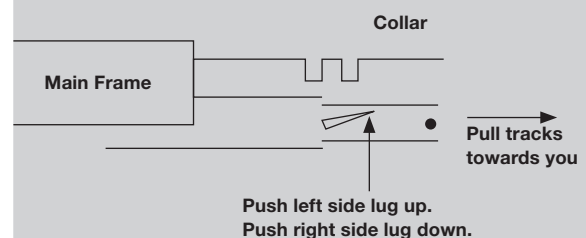

Questions

New Zealand: Phone: (09) 426-7456 **Email:** info@hideawaybins.co.nz **Web:** www.hideawaybins.co.nz

Australia: Freephone: 1800 042 642 **Email:** info@hideawaybins.co.nz **Web:** www.hideawaybins.com.au